


NOTES

1. TOP EDGE OF TRENCH ON CURB SIDE SHALL BE MAINTAINED AT A MINIMUM DISTANCE OF 1' FROM LIP OF GUTTER. DISTANCE FROM CURB FACE TO TRENCH CENTER LINE SHALL BE ADJUSTED ACCORDINGLY.
2. WHEN EDGE OF TRENCH IS LESS THAN 3' FROM LIP OF GUTTER, REMOVE ALL AC BETWEEN LIP OF GUTTER AND EDGE OF TRENCH.
3. WHEN EXCAVATION IS IN SIDEWALK, THE FULL WIDTH OF THE SIDEWALK SHALL BE REMOVED AT NEAREST SCORE LINES AND REPLACED PER APWA STD. 112-1.
4. BACKFILL MATERIAL SHALL BE PER GENERAL NOTE NO. 11 OF THESE STD. PLANS AND SECTION 200-2 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION. BACKFILL SHALL BE PLACED AND COMPACTED IN ACCORDANCE WITH SECTION 306-1.3 OF THE ABOVE SPECIFICATION.
5. RESTORE ALL EXISTING AC PAVEMENT, DAMAGED DURING CONSTRUCTION, TO ORIGINAL OR BETTER CONDITION AFTER BACKFILL IS COMPLETED.
6. TRENCHES EXCEEDING 5' DEPTHS MUST BE SHORED AT ALL TIMES OR EXCAVATED IN ACCORDANCE WITH SECTION 1541.1 OF CAL/OSHA.

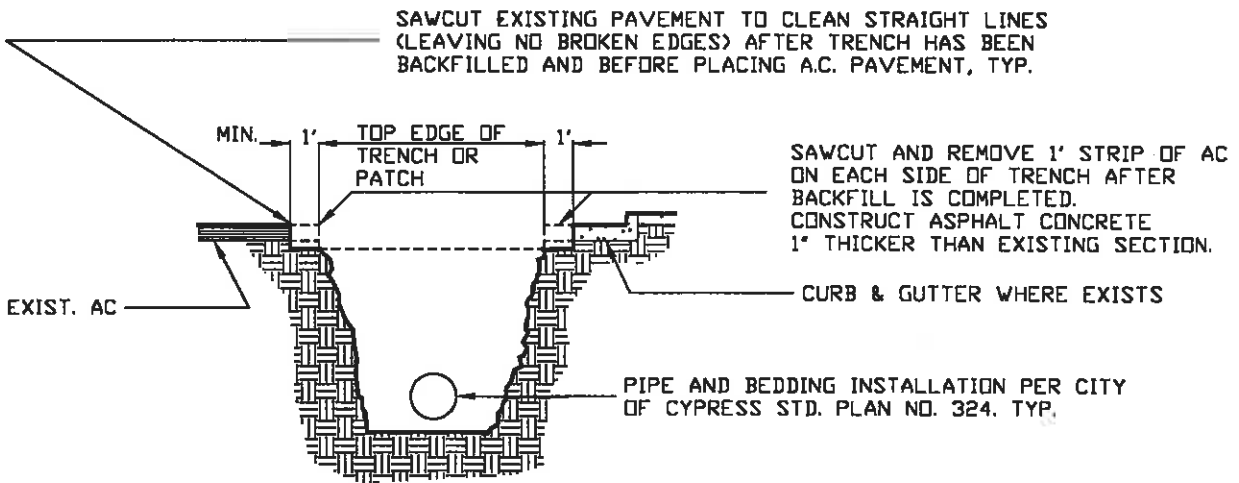

▲		
▲		
▲		
Rev.	Approved	Date

NOT TO SCALE

<p>CITY OF CYPRESS DEPARTMENT OF PUBLIC WORKS ENGINEERING DIVISION</p>	<p>STANDARD TRENCH DETAIL WITHIN PUBLIC RIGHT OF WAY</p>
<p>APP 12/13/99 Director of Public Works Date</p>	<p>STD. PLAN NO. 109</p>