



REQUIREMENTS:

1. SIZE AND LOCATION OF INTERCEPTOR TO BE APPROVED PRIOR TO INSTALLATION, MIN. TANK SIZE SHALL BE 750 GAL
2. INTERCEPTOR TO HAVE:
 - a. SAMPLE BOX
 - b. SANITARY TEE; INSIDE SAMPLE BOX, DISCHARGE SIDE
 - c. VENT
 - d. CLEANOUT PRIOR TO LATERAL CONNECTION
 - e. MANHOLE AT EACH INTERNAL BAFFLE TUBE -- NO MORE THAN 10' BETWEEN MANHOLES
3. INSPECTION OF INTERCEPTOR:
 - a. ALL CONNECTIONS TO INTERCEPTOR TO BE INSPECTED BY CITY PRIOR TO BACKFILL
 - b. INTERCEPTOR TO BE FILLED WITH WATER PRIOR TO INSPECTION, PER MANUFACTURERS INSTRUCTION OR REQUEST.
4. ALL MANHOLES AND SAMPLE BOXES TO BE INSTALLED A MINIMUM OF 1/2" ABOVE FINISH.
5. GRADE/PAVEMENT WITH A CONCRETE COLLAR A MINIMUM OF 18" AROUND ALL MANHOLE LIDS AND 12" DEEP. CONCRETE COLLAR, SAMPLE BOX FITTING, AND ALL EXTERIOR PIPING SUPPLIED BY INSTALLER.

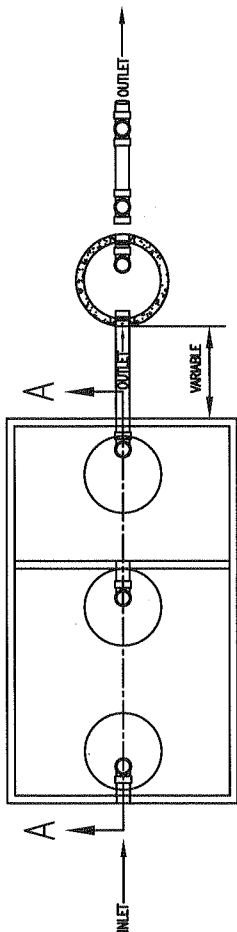


PLAN VIEW

SAMPLE BOX

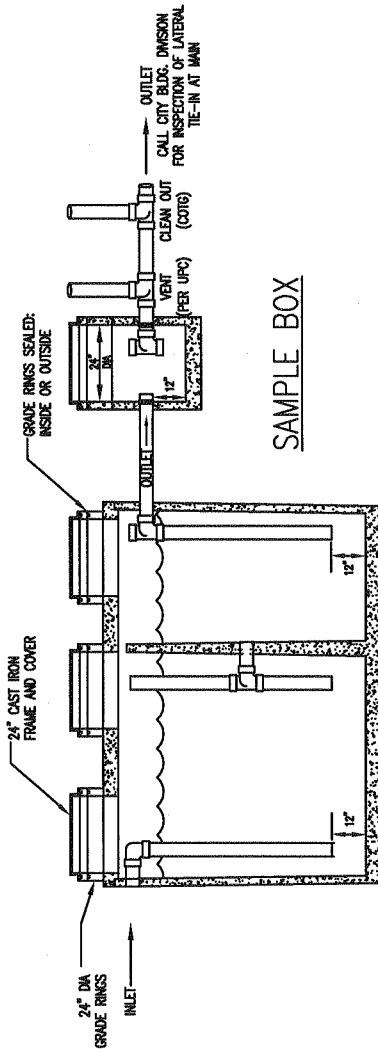

SIDE VIEW

SAMPLE BOX

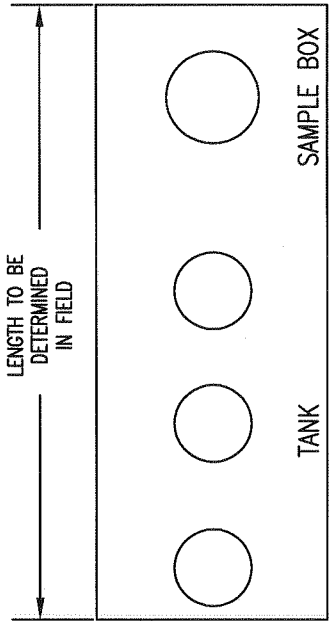

CONCRETE COLLAR DETAIL
PLAN VIEW




SIDE VIEW



END VIEW

GREASE INTERCEPTOR TANK WITH SAMPLE BOX

STANDARD PLAN
299

APPROVED	<i>Bob Jackson</i> 9/26/07	PUBLIC	REVISIONS	SUPERCEDES REFERENCES
BUILDING OFFICIAL / DATE			DESCRIPTIONS	STD PLAN 299
APPROVED				DATED 03-2006
DIRECTOR OF PUBLIC WORKS - PGE 57202 / DATE		WORKS		
DRAWN BY : NW		CHECKED BY : GV		NOT TO SCALE